

Aggregate Optimization Chart

MIX ID'S: DDT0F7ET

Production Gradation Report

PLANT #: **P-102**

Sample Date: 9/24/18

Concrete Grade: **TM**

Contractor: _____

Dates Test Represents: 9/25/2018 through 10/1/2018

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	58-003	Stoneco	1495	8.91	2.69	49.1
26A	58-003	Stoneco	350	2.09	2.69	11.5
2NS	38-046	Chelsea	1200	7.26	2.65	39.4
Total Wt			3045	18.25		100.0

<----- Verify this number is 100%

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	99.5	100.0	100.0	99.8	0.2	0.2
3/4"	82.1	100.0	100.0	91.2	8.5	8.8
1/2"	41.4	99.8	100.0	71.2	20.0	28.8
3/8"	17.2	89.7	100.0	58.2	13.0	41.8
#4	2.0	20.9	100.0	42.8	15.4	57.2
#8	1.0	4.3	88.0	35.7	7.1	64.3
#16	0.8	1.4	65.0	26.2	9.5	73.8
#30	0.7	0.9	46.0	18.6	7.6	81.4
#50	0.7	0.8	25.0	10.3	8.3	89.7
#100	0.5	0.7	6.0	2.7	7.6	97.3
LBW	0.5	0.5	1.0	0.7	2.0	99.3


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor: 65 **Workability Factor: 36**

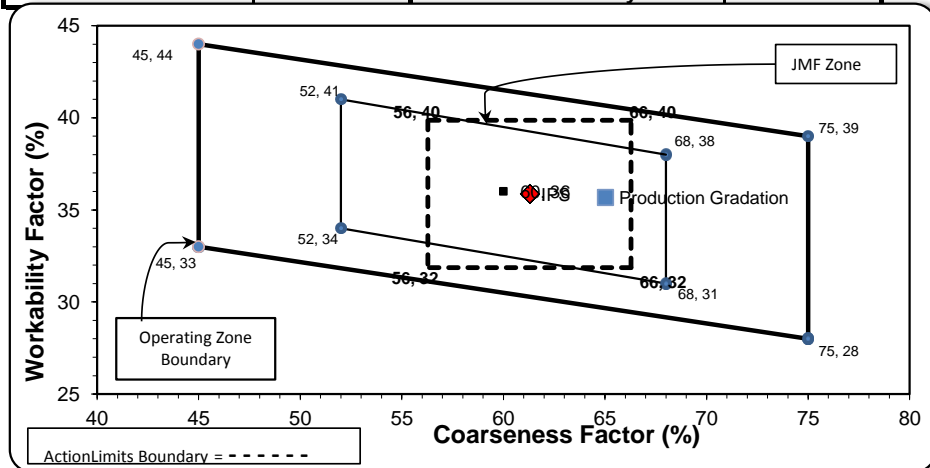

Initial Production Sample (IPS)

Coarseness Factor: 61		Workability Factor: 36	
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	99.3	0.7	0.7
3/4"	89.2	10.1	10.8
1/2"	70.7	18.5	29.3
3/8"	60.7	10.0	39.3
#4	44.4	16.3	55.6
#8	35.9	8.5	64.1
#16	27.3	8.6	72.7
#30	19.1	8.2	80.9
#50	7.4	11.7	92.6
#100	1.9	5.6	98.1
LBW	0.7	1.2	99.3

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

MIX ID'S: DDT0F7ET

Production Gradation Report

PLANT #: **P-36**

Sample Date: 9/24/18

Concrete Grade: **TM**

Contractor: _____

Dates Test Represents: 9/25/2018 through 10/1/2018

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1495	9.14	2.62	49.9
26A	71-47	Presque Isle	300	1.83	2.62	10.0
2NS	63-92	AA Grange Hall	1200	7.26	2.65	40.1
Total Wt			2995	18.24		100.0

<----- Verify this number is 100%

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	100.0	100.0	100.0	100.0	0.0	0.0
3/4"	83.9	100.0	100.0	92.0	8.0	8.0
1/2"	41.8	95.8	100.0	70.5	21.4	29.5
3/8"	23.1	81.7	100.0	59.8	10.7	40.2
#4	4.7	21.3	97.4	43.5	16.3	56.5
#8	2.5	7.2	83.7	35.5	8.0	64.5
#16	2.2	4.0	68.0	28.7	6.8	71.3
#30	2.1	3.2	50.8	21.7	7.0	78.3
#50	2.0	2.9	24.1	10.9	10.8	89.1
#100	1.9	2.6	4.1	2.9	8.1	97.1
LBW	1.5	2.0	0.3	1.1	1.8	98.9




Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Coarseness Factor: 62 **Workability Factor: 36**

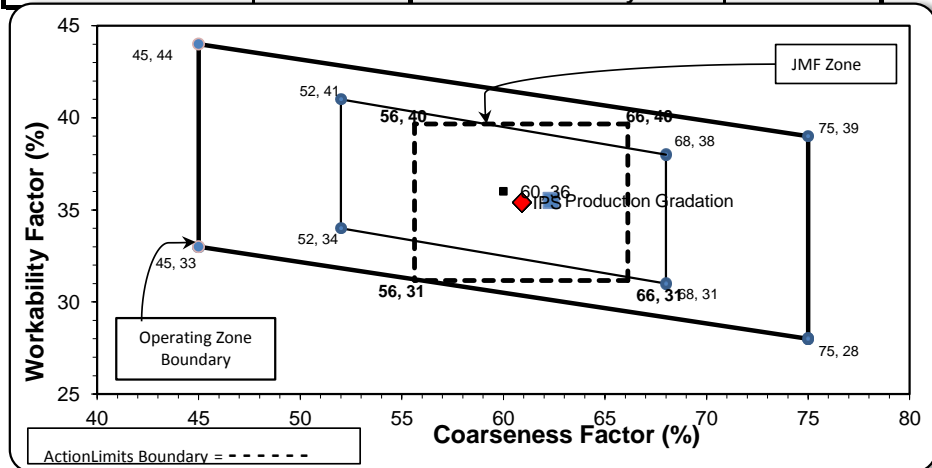

Initial Production Sample (IPS)

Coarseness Factor: 61		Workability Factor: 35	
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	95.9	4.1	4.1
1/2"	74.3	21.5	25.7
3/8"	60.7	13.6	39.3
#4	42.6	18.1	57.4
#8	35.4	7.2	64.6
#16	28.7	6.7	71.3
#30	20.5	8.2	79.5
#50	9.8	10.7	90.2
#100	2.1	7.7	97.9
LBW	0.9	1.2	99.1

PREPARED BY:
 SM, LLC Technical Service

Approved By: