

Aggregate Optimization Chart

Production Gradation Report

PLANT #: **P-101**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Dates Test Represents: 8/9/2022 through 8/15/2022

Contractor: _____

MDOT No.: _____



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1460	8.93	2.62	50.2
26A	71-47	Presque Isle	300	1.83	2.62	10.3
2NS	75-051	Mid Michigan	1150	6.93	2.66	39.5
Total Wt			2910	17.69		100.0

<----- Verify this number is 100%

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	98.0	100.0	100.0	99.0	1.0	1.0
3/4"	87.4	100.0	100.0	93.7	5.3	6.3
1/2"	41.8	98.7	100.0	70.7	23.0	29.3
3/8"	21.0	87.9	100.0	59.1	11.5	40.9
#4	2.9	22.1	99.0	42.9	16.3	57.1
#8	1.9	5.2	85.3	35.2	7.7	64.8
#16	1.6	2.9	70.1	28.8	6.4	71.2
#30	1.5	2.4	53.2	22.0	6.8	78.0
#50	1.4	2.1	26.3	11.3	10.7	88.7
#100	1.3	1.9	6.8	3.5	7.8	96.5
LBW	1.2	1.7	1.0	1.2	2.4	98.8


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	63	Workability Factor:	35	Adjusted WF	37.7
---------------------------	-----------	----------------------------	-----------	--------------------	-------------

Coarseness Factor:	62
Workability Factor:	35

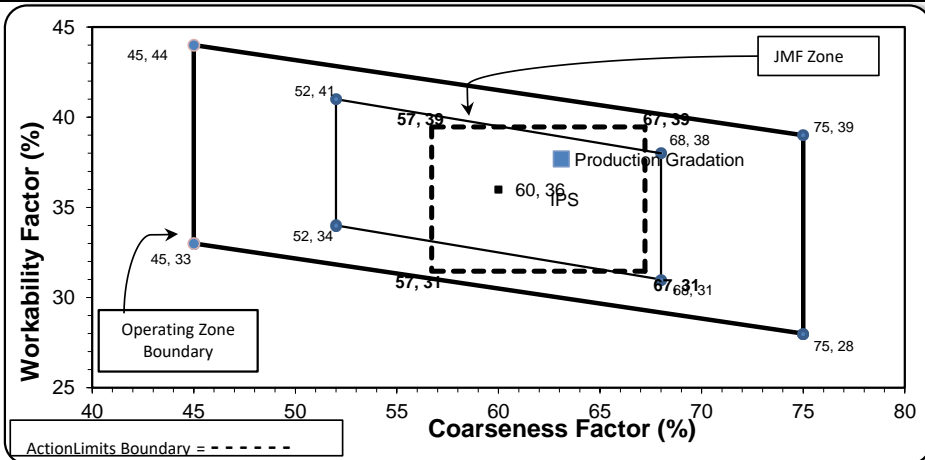

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	95.0	5.0	5.0
1/2"	70.5	24.5	29.5
3/8"	60.0	10.5	40.0
#4	44.4	15.6	55.6
#8	35.5	9.0	64.5
#16	28.5	7.0	71.5
#30	21.5	7.0	78.5
#50	10.2	11.3	89.8
#100	3.1	7.1	96.9
LBW	1.3	1.8	98.7

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-102**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Contractor: _____

Dates Test Represents: 8/9/2022 through 8/15/2022

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	58-003	Stoneco	1400	8.34	2.69	47.5
26A	58-003	Stoneco	400	2.38	2.69	13.6
2NS	81-019	Pleasant Lake	1150	6.95	2.65	39.0
Total Wt			2950	17.68		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	99.8	100.0	100.0	99.9	0.1	0.1
3/4"	80.8	100.0	100.0	90.9	9.0	9.1
1/2"	36.8	99.5	100.0	69.9	20.9	30.1
3/8"	16.1	82.5	100.0	57.8	12.1	42.2
#4	2.9	12.7	99.3	41.8	16.0	58.2
#8	1.4	4.3	84.2	34.1	7.7	65.9
#16	1.2	2.9	66.5	26.9	7.2	73.1
#30	1.0	2.4	48.3	19.6	7.3	80.4
#50	0.9	2.2	25.1	10.5	9.1	89.5
#100	0.9	2.1	7.8	3.8	6.8	96.2
LBW	0.7	1.9	1.4	1.1	2.6	98.9


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	64	Workability Factor:	34	36.6	Coarseness Factor:	61
---------------------------	-----------	----------------------------	-----------	-------------	---------------------------	-----------

Workability Factor:	36
----------------------------	-----------

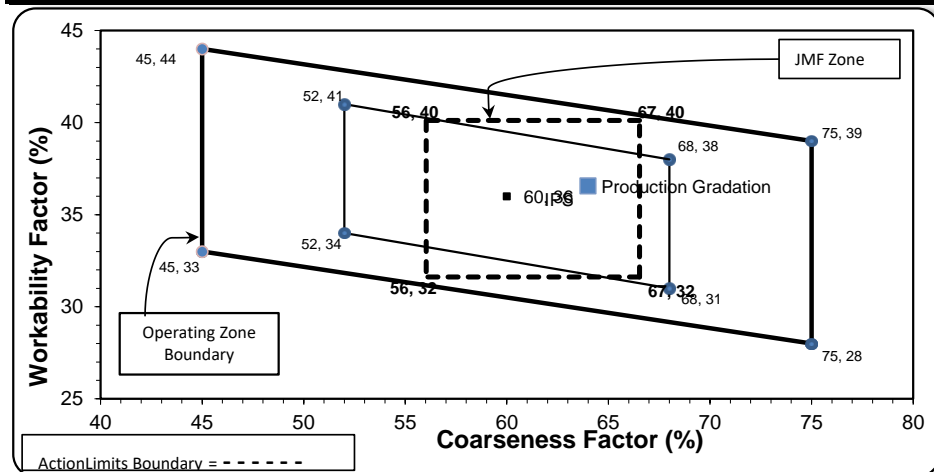

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	99.3	0.7	0.7
3/4"	89.2	10.1	10.8
1/2"	70.7	18.5	29.3
3/8"	60.7	10.0	39.3
#4	44.4	16.3	55.6
#8	35.9	8.5	64.1
#16	27.3	8.6	72.7
#30	19.1	8.2	80.9
#50	7.4	11.7	92.6
#100	1.9	5.6	98.1
LBW	0.7	1.2	99.3

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-103**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Contractor: _____

Dates Test Represents: 8/9/2022 through 8/15/2022

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	58-003	Stoneco	1400	8.34	2.69	47.5
26A	58-003	Stoneco	400	2.38	2.69	13.6
2NS	81-019	Pleasant Lake	1150	6.95	2.65	39.0
Total Wt			2950	17.68		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	99.8	100.0	100.0	99.9	0.1	0.1
3/4"	80.8	100.0	100.0	90.9	9.0	9.1
1/2"	36.8	99.5	100.0	69.9	20.9	30.1
3/8"	16.1	82.5	100.0	57.8	12.1	42.2
#4	2.9	12.7	99.3	41.8	16.0	58.2
#8	1.4	4.3	84.2	34.1	7.7	65.9
#16	1.2	2.9	66.5	26.9	7.2	73.1
#30	1.0	2.4	48.3	19.6	7.3	80.4
#50	0.9	2.2	25.1	10.5	9.1	89.5
#100	0.9	2.1	7.8	3.8	6.8	96.2
LBW	0.7	1.9	1.4	1.1	2.6	98.9


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	64	Workability Factor:	34	36.6	Coarseness Factor:	61
---------------------------	-----------	----------------------------	-----------	-------------	---------------------------	-----------

Workability Factor:	36
----------------------------	-----------

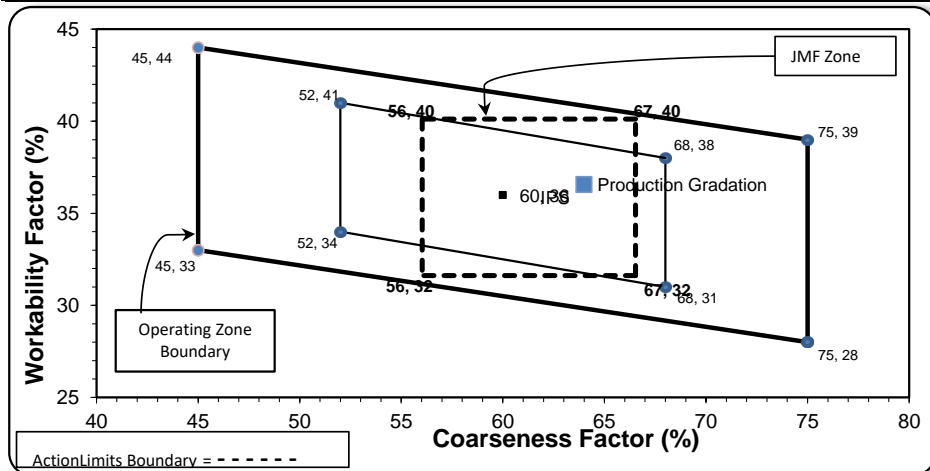

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	99.3	0.7	0.7
3/4"	89.2	10.1	10.8
1/2"	70.7	18.5	29.3
3/8"	60.7	10.0	39.3
#4	44.4	16.3	55.6
#8	35.9	8.5	64.1
#16	27.3	8.6	72.7
#30	19.1	8.2	80.9
#50	7.4	11.7	92.6
#100	1.9	5.6	98.1
LBW	0.7	1.2	99.3

PREPARED BY:
 SM, LLC Technical Service

Approved BY:

Aggregate Optimization Chart

PLANT #: **P-12**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Contractor: _____

Dates Test Represents: 8/9/2022 through 8/15/2022

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1505	9.21	2.62	51.8
26A	71-47	Presque Isle	250	1.53	2.62	8.6
2NS	63-115	Ray Rd	1150	6.95	2.65	39.6
Total Wt			2905	17.69		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336


Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	94.8	100.0	100.0	97.3	2.7	2.7
3/4"	71.3	100.0	100.0	85.1	12.2	14.9
1/2"	33.8	96.8	100.0	65.4	19.7	34.6
3/8"	16.5	86.1	100.0	55.5	9.9	44.5
#4	3.9	27.7	96.0	42.4	13.1	57.6
#8	2.6	8.2	77.5	32.7	9.7	67.3
#16	2.1	3.8	61.4	25.7	7.0	74.3
#30	1.8	2.8	46.2	19.5	6.3	80.5
#50	1.7	2.5	27.0	11.8	7.7	88.2
#100	1.5	2.3	7.2	3.8	8.0	96.2
LBW	1.2	1.9	1.0	1.2	2.6	98.8

*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor: 66	Workability Factor: 33	35.2	Coarseness Factor: 63
-------------------------------------	--------------------------------------	-------------	-------------------------------------

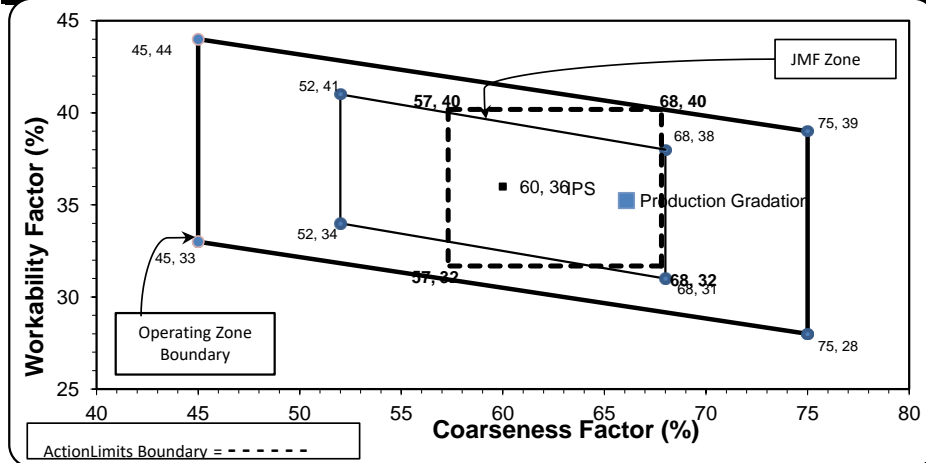

Coarseness Factor: 63	Workability Factor: 36
-------------------------------------	--------------------------------------

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	99.3	0.7	0.7
3/4"	89.0	10.3	11.0
1/2"	70.3	18.7	29.7
3/8"	59.9	10.4	40.1
#4	41.9	18.0	58.1
#8	35.9	6.0	64.1
#16	27.8	8.2	72.2
#30	18.9	8.8	81.1
#50	6.3	12.6	93.7
#100	1.7	4.6	98.3
LBW	1.0	0.7	99.0

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-32**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Contractor: _____

Dates Test Represents: 8/9/2022 through 8/15/2022

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1555	9.51	2.62	53.5
26A	71-47	Presque Isle	200	1.22	2.62	6.9
2NS	95-013	Smelter Bay	1150	6.95	2.65	39.6
Total Wt			2905	17.69		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	100.0	100.0	100.0	100.0	0.0	0.0
3/4"	80.2	100.0	100.0	89.4	10.6	10.6
1/2"	43.6	96.8	100.0	69.6	19.8	30.4
3/8"	24.9	86.1	100.0	58.8	10.7	41.2
#4	4.4	27.7	96.8	42.6	16.3	57.4
#8	2.0	8.2	84.7	35.2	7.4	64.8
#16	1.8	3.8	69.2	28.6	6.5	71.4
#30	1.7	2.8	49.9	20.9	7.8	79.1
#50	1.6	2.5	24.5	10.7	10.1	89.3
#100	1.6	2.3	7.4	3.9	6.8	96.1
LBW	1.3	1.9	1.6	1.5	2.5	98.5


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	63	Workability Factor:	35	37.7
---------------------------	-----------	----------------------------	-----------	-------------

Coarseness Factor:	62
Workability Factor:	36

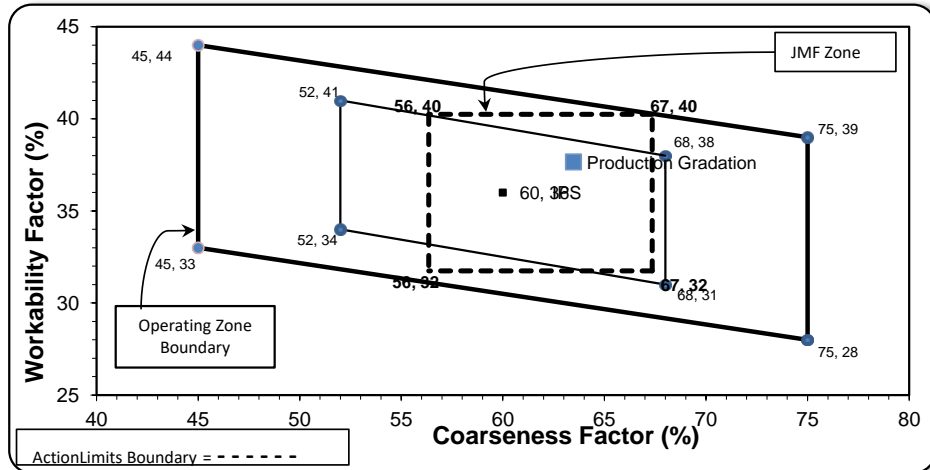

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	95.0	5.0	5.0
1/2"	72.3	22.8	27.7
3/8"	60.4	11.8	39.6
#4	42.6	17.8	57.4
#8	36.0	6.6	64.0
#16	29.5	6.5	70.5
#30	20.3	9.2	79.7
#50	9.5	10.8	90.5
#100	3.4	6.1	96.6
LBW	1.3	2.1	98.7

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-35**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Contractor: _____

Dates Test Represents: 8/9/2022 through 8/15/2022

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	58-003	Stoneco	1400	8.34	2.69	47.5
26A	58-003	Stoneco	400	2.38	2.69	13.6
2NS	81-019	Pleasant Lake	1150	6.95	2.65	39.0
Total Wt			2950	17.68		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	99.8	100.0	100.0	99.9	0.1	0.1
3/4"	80.8	100.0	100.0	90.9	9.0	9.1
1/2"	36.8	99.5	100.0	69.9	20.9	30.1
3/8"	16.1	82.5	100.0	57.8	12.1	42.2
#4	2.9	12.7	99.3	41.8	16.0	58.2
#8	1.4	4.3	84.2	34.1	7.7	65.9
#16	1.2	2.9	66.5	26.9	7.2	73.1
#30	1.0	2.4	48.3	19.6	7.3	80.4
#50	0.9	2.2	25.1	10.5	9.1	89.5
#100	0.9	2.1	7.8	3.8	6.8	96.2
LBW	0.7	1.9	1.4	1.1	2.6	98.9


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	64	Workability Factor:	34	36.6	Coarseness Factor:	61
---------------------------	-----------	----------------------------	-----------	-------------	---------------------------	-----------

Workability Factor:	36
----------------------------	-----------

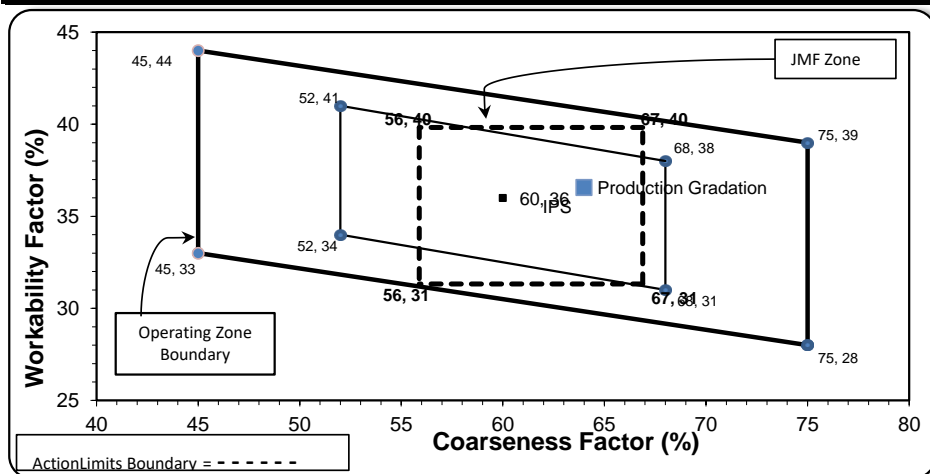

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	99.3	0.7	0.7
3/4"	89.1	10.2	10.9
1/2"	70.5	18.6	29.5
3/8"	60.5	10.0	39.5
#4	44.1	16.4	55.9
#8	35.6	8.5	64.4
#16	27.7	7.9	72.3
#30	20.6	7.1	79.4
#50	8.7	11.8	91.3
#100	1.6	7.1	98.4
LBW	1.1	0.6	98.9

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-36**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Contractor: _____

Dates Test Represents: 8/9/2022 through 8/15/2022

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1505	9.21	2.62	51.8
26A	71-47	Presque Isle	300	1.83	2.62	10.3
2NS	63-92	Grange Hall	1100	6.65	2.65	37.9
Total Wt			2905	17.69		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	94.8	100.0	100.0	97.3	2.7	2.7
3/4"	71.3	100.0	100.0	85.1	12.2	14.9
1/2"	33.8	96.8	100.0	65.4	19.8	34.6
3/8"	16.5	86.1	100.0	55.3	10.1	44.7
#4	3.9	27.7	97.5	41.8	13.5	58.2
#8	2.6	8.2	82.1	33.3	8.5	66.7
#16	2.1	3.8	67.4	27.0	6.3	73.0
#30	1.8	2.8	49.3	19.9	7.1	80.1
#50	1.7	2.5	21.5	9.3	10.6	90.7
#100	1.5	2.3	3.8	2.5	6.8	97.5
LBW	1.2	1.9	0.8	1.1	1.3	98.9


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	67	Workability Factor:	33	Adjusted WF	35.8
---------------------------	-----------	----------------------------	-----------	--------------------	-------------

Coarseness Factor:	63
Workability Factor:	35

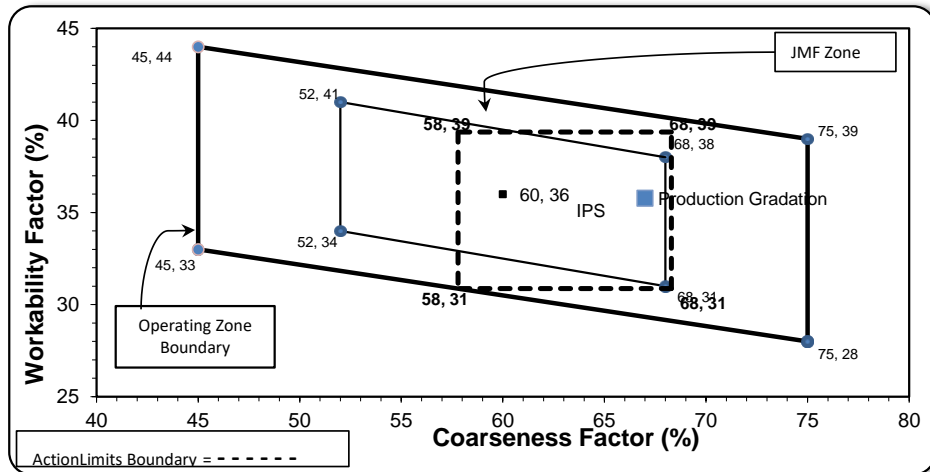

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	99.1	0.9	0.9
3/4"	90.3	8.8	9.7
1/2"	69.2	21.1	30.8
3/8"	59.1	10.1	40.9
#4	41.8	17.3	58.2
#8	35.1	6.6	64.9
#16	28.5	6.6	71.5
#30	21.2	7.3	78.8
#50	8.7	12.5	91.3
#100	1.8	7.0	98.2
LBW	0.7	1.0	99.3

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-39**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Contractor: _____

Dates Test Represents: 8/9/2022 through 8/15/2022

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1605	9.82	2.62	55.2
26A	71-47	Presque Isle	200	1.22	2.62	6.9
2NS	44-051	Krake Willis Rd	1100	6.65	2.65	37.9
Total Wt			2905	17.69		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	98.0	100.0	100.0	98.9	1.1	1.1
3/4"	87.4	100.0	100.0	93.0	5.9	7.0
1/2"	41.8	98.7	100.0	67.8	25.3	32.2
3/8"	21.0	87.9	100.0	55.5	12.2	44.5
#4	2.9	22.1	96.2	39.6	16.0	60.4
#8	1.9	5.2	80.2	31.8	7.8	68.2
#16	1.6	2.9	66.2	26.2	5.6	73.8
#30	1.5	2.4	50.4	20.1	6.1	79.9
#50	1.4	2.1	24.8	10.3	9.8	89.7
#100	1.3	1.9	6.4	3.3	7.0	96.7
LBW	1.2	1.7	0.4	0.9	2.3	99.1


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	65	Workability Factor:	32	Adjusted WF	34.3
---------------------------	-----------	----------------------------	-----------	--------------------	-------------

Coarseness Factor:	63
Workability Factor:	36

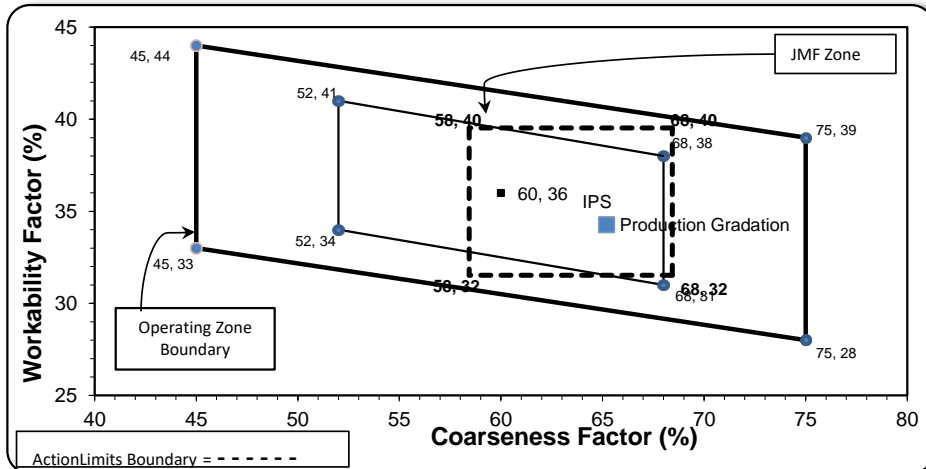

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	89.7	10.3	10.3
1/2"	70.3	19.4	29.7
3/8"	59.1	11.2	40.9
#4	42.8	16.3	57.2
#8	35.5	7.3	64.5
#16	29.0	6.5	71.0
#30	21.2	7.7	78.8
#50	9.8	11.5	90.2
#100	3.7	6.1	96.3
LBW	1.2	2.5	98.8

PREPARED BY:
 SM, LLC Technical Service

Approved By:

Aggregate Optimization Chart

PLANT #: **P-02**

Sample Date: 8/8/22

Concrete Grade: **DM, 4500HP**

Contractor: _____

Dates Test Represents: 8/9/2022 through 8/15/2022

MDOT No.: _____

Agg. Class	Pit #	Source	Weight (SSD)	ft ³	Specific Gravity	% Contribution
6AA	71-47	Presque Isle	1505	9.21	2.62	51.8
26A	71-47	Presque Isle	250	1.53	2.62	8.6
2NS	63-115	Ray Rd	1150	6.95	2.65	39.6
Total Wt			2905	17.69		100.0

<----- Verify this number is 100%



Superior Materials, LLC
 30701 W. 10 Mile Rd.
 Suite 500
 Farmington Hills, MI 48336

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	94.8	100.0	100.0	97.3	2.7	2.7
3/4"	71.3	100.0	100.0	85.1	12.2	14.9
1/2"	33.8	96.8	100.0	65.4	19.7	34.6
3/8"	16.5	86.1	100.0	55.5	9.9	44.5
#4	3.9	27.7	96.0	42.4	13.1	57.6
#8	2.6	8.2	77.5	32.7	9.7	67.3
#16	2.1	3.8	61.4	25.7	7.0	74.3
#30	1.8	2.8	46.2	19.5	6.3	80.5
#50	1.7	2.5	27.0	11.8	7.7	88.2
#100	1.5	2.3	7.2	3.8	8.0	96.2
LBW	1.2	1.9	1.0	1.2	2.6	98.8


*Maximum % Retained must be above the 3/8" sieve.
 *Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.
 *% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation Batch Plant Gradations Aggregate Supplier Gradations

Adjusted WF Initial Production Sample (IPS)

Coarseness Factor:	66	Workability Factor:	33	Adjusted WF	35.2
---------------------------	-----------	----------------------------	-----------	--------------------	-------------

Coarseness Factor:	63
Workability Factor:	35

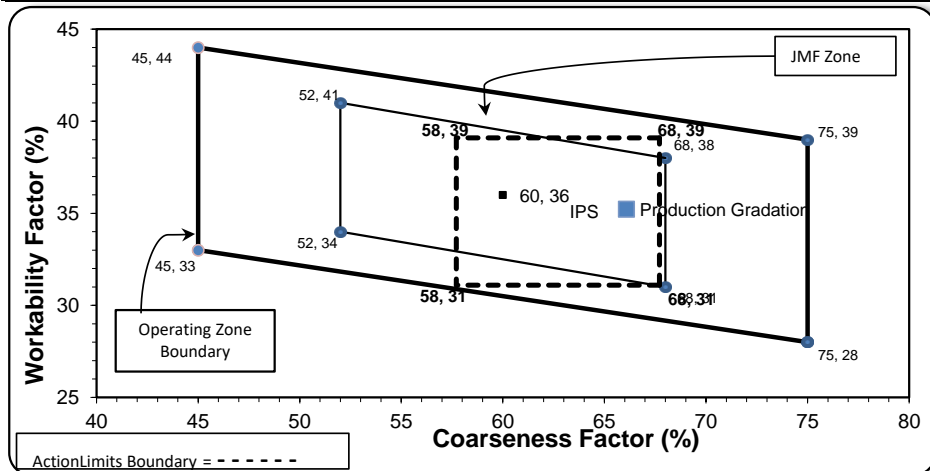

Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	95.1	4.9	4.9
1/2"	74.6	20.5	25.4
3/8"	59.3	15.3	40.7
#4	42.1	17.2	57.9
#8	35.1	7.1	64.9
#16	29.2	5.9	70.8
#30	21.9	7.3	78.1
#50	9.6	12.4	90.4
#100	2.4	7.2	97.6
LBW	0.9	1.5	99.1

PREPARED BY:
 SM, LLC Technical Service

Approved By: