

# Aggregate Optimization Chart

MIX ID'S: DDS257E7, DDS257E5 and DDS257E8

Production Gradation Report

**PLANT #:** **P-103**

Sample Date: 6/26/17

Concrete Grade: **S2M**

Contractor: \_\_\_\_\_

Dates Test Represents: 6/26/2017 to 7/2/2017

MDOT No.: \_\_\_\_\_

Agg. Class	Pit #	Source	Weight (SSD)	ft <sup>3</sup>	Specific Gravity	% Contribution
6AA	58-003	Stoneco	1600	9.53	2.69	50.7
26A	58-003	Stoneco	255	1.52	2.69	8.1
2NS	81-93	Burmeister	1300	7.89	2.64	41.2
<b>Total Wt</b>			<b>3155</b>	<b>18.94</b>		<b>100.0</b>

<----- Verify this number is 100%

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	99.7	100.0	100.0	99.8	0.2	0.2
3/4"	81.0	100.0	100.0	90.4	9.5	9.6
1/2"	45.0	99.9	100.0	72.1	18.3	27.9
3/8"	25.2	86.7	100.0	61.0	11.1	39.0
#4	3.5	26.3	98.9	44.7	16.3	55.3
#8	1.2	6.2	85.2	36.2	8.4	63.8
#16	1.2	2.9	69.0	29.3	6.9	70.7
#30	1.0	2.2	48.2	20.5	8.7	79.5
#50	1.0	2.0	21.0	9.3	11.2	90.7
#100	0.8	1.9	5.0	2.6	6.7	97.4
LBW	0.7	1.7	1.5	1.1	1.5	98.9




**Superior Materials, LLC**  
 30701 W. 10 Mile Rd.  
 Suite 500  
 Farmington Hills, MI 48336

\*Maximum % Retained must be above the 3/8" sieve.  
 \*Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.  
 \*% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.  
 \*% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation  Batch Plant Gradations  Aggregate Supplier Gradations

<b>Coarseness Factor:</b>	<b>61</b>	<b>Workability Factor:</b>	<b>36</b>
---------------------------	-----------	----------------------------	-----------

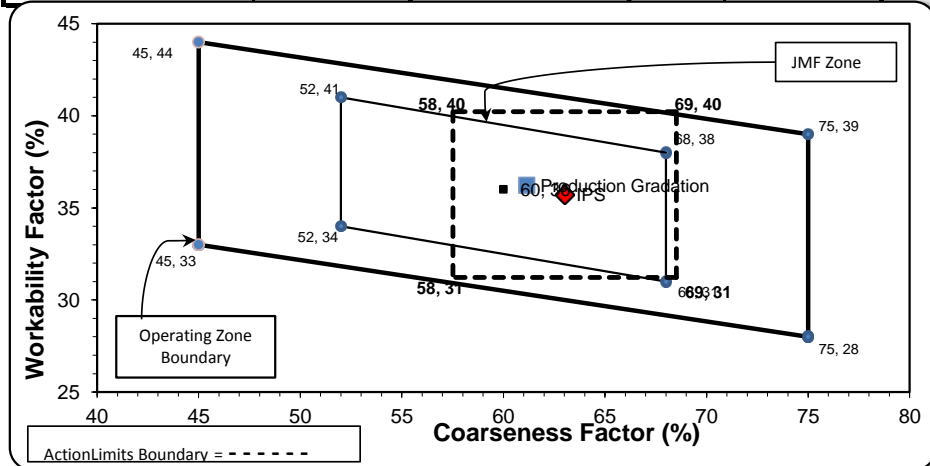

Initial Production Sample (IPS)

<b>Coarseness Factor:</b>	<b>63</b>		
<b>Workability Factor:</b>	<b>36</b>		
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	99.2	0.8	0.8
3/4"	90.9	8.3	9.1
1/2"	71.3	19.6	28.7
3/8"	59.5	11.8	40.5
#4	43.8	15.7	56.2
#8	35.7	8.1	64.3
#16	27.0	8.7	73.0
#30	18.6	8.4	81.4
#50	6.8	11.8	93.2
#100	1.4	5.4	98.6
LBW	0.6	0.8	99.4

PREPARED BY:  
 SM, LLC Technical Service

Approved BY:

# Aggregate Optimization Chart

MIX ID'S: WSN175E9

Production Gradation Report

**PLANT #:** **P-36**

Sample Date: 6/26/17

Dates Test Represents: 6/26/2017 to 7/2/2017

Concrete Grade: **S2M (SPECIAL, 5000 PSI)**

Contractor: \_\_\_\_\_

MDOT No.: \_\_\_\_\_

Agg. Class	Pit #	Source	Weight (SSD)	ft <sup>3</sup>	Specific Gravity	% Contribution
6AA	58-003	Stoneco	1520	9.06	2.69	50.8
26A	71-47	Presque Isle	260	1.59	2.62	8.7
2NS	63-92	AA Grange Hall	1210	7.32	2.65	40.5
<b>Total Wt</b>			<b>2990</b>	<b>17.96</b>		<b>100.0</b>

<----- Verify this number is 100%

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	99.7	100.0	100.0	99.8	0.2	0.2
3/4"	81.0	100.0	100.0	90.3	9.5	9.7
1/2"	45.0	98.7	100.0	71.9	18.4	28.1
3/8"	25.2	87.0	100.0	60.8	11.1	39.2
#4	3.5	11.1	98.6	42.6	18.2	57.4
#8	1.2	2.3	87.8	36.3	6.3	63.7
#16	1.2	1.7	70.1	29.1	7.2	70.9
#30	1.0	1.6	47.7	20.0	9.2	80.0
#50	1.0	1.6	16.4	7.3	12.7	92.7
#100	0.8	1.5	2.4	1.5	5.8	98.5
LBW	0.7	1.4	0.3	0.6	0.9	99.4


\*Maximum % Retained must be above the 3/8" sieve.  
 \*Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.  
 \*% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.  
 \*% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.



**Superior Materials, LLC**  
 30701 W. 10 Mile Rd.  
 Suite 500  
 Farmington Hills, MI 48336

Production Gradation  Batch Plant Gradations  Aggregate Supplier Gradations

**Coarseness Factor: 62**      **Workability Factor: 36**

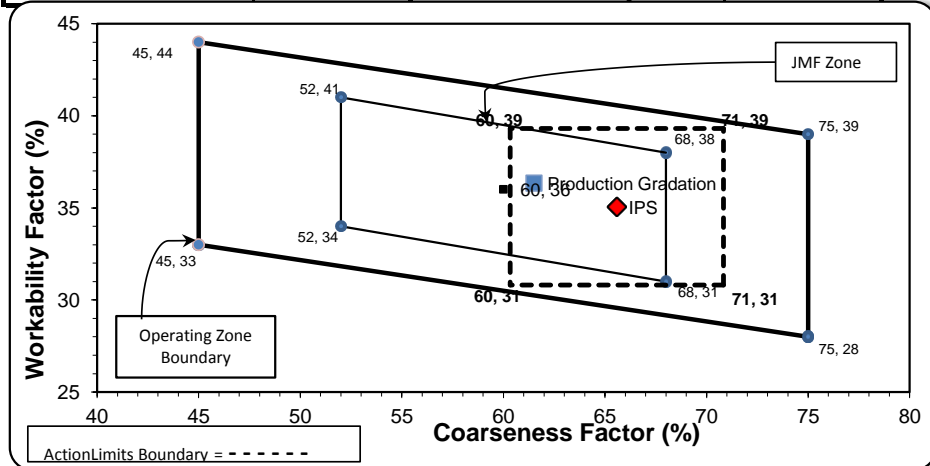

Initial Production Sample (IPS)

Coarseness Factor: 66		Workability Factor: 35	
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	100.0	0.0	0.0
3/4"	91.7	8.3	8.3
1/2"	66.8	24.8	33.2
3/8"	57.4	9.4	42.6
#4	43.0	14.4	57.0
#8	35.1	7.9	64.9
#16	28.0	7.1	72.0
#30	19.5	8.5	80.5
#50	8.1	11.4	91.9
#100	2.0	6.1	98.0
LBW	0.7	1.3	99.3

PREPARED BY:  
 SM, LLC Technical Service

Approved By:

# Aggregate Optimization Chart

MIX ID'S: DDS257E7, DDS257E5 and DDS257E8

Production Gradation Report

**PLANT #:** **P-38**

Sample Date: 6/26/17

Concrete Grade: **S2M**

Contractor: \_\_\_\_\_

Dates Test Represents: 6/26/2017 to 7/2/2017

MDOT No.: \_\_\_\_\_

Agg. Class	Pit #	Source	Weight (SSD)	ft <sup>3</sup>	Specific Gravity	% Contribution
6AA	58-003	Stoneco	1600	9.53	2.69	50.7
26A	58-003	Stoneco	255	1.52	2.69	8.1
2NS	81-93	Burmeister	1300	7.89	2.64	41.2
<b>Total Wt</b>			<b>3155</b>	<b>18.94</b>		<b>100.0</b>

<----- Verify this number is 100%

Sieve	6AA	26A	2NS	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	100.0	100.0	100.0	0.0	0.0
1.5"	100.0	100.0	100.0	100.0	0.0	0.0
1"	99.7	100.0	100.0	99.8	0.2	0.2
3/4"	81.0	100.0	100.0	90.4	9.5	9.6
1/2"	45.0	99.9	100.0	72.1	18.3	27.9
3/8"	25.2	86.7	100.0	61.0	11.1	39.0
#4	3.5	26.3	98.9	44.7	16.3	55.3
#8	1.2	6.2	85.2	36.2	8.4	63.8
#16	1.2	2.9	69.0	29.3	6.9	70.7
#30	1.0	2.2	48.2	20.5	8.7	79.5
#50	1.0	2.0	21.0	9.3	11.2	90.7
#100	0.8	1.9	5.0	2.6	6.7	97.4
LBW	0.7	1.7	1.5	1.1	1.5	98.9




**Superior Materials, LLC**  
 30701 W. 10 Mile Rd.  
 Suite 500  
 Farmington Hills, MI 48336

\*Maximum % Retained must be above the 3/8" sieve.  
 \*Any two adjacent sieves must equal 10% except max., nom. max., #100 and #200 sieves.  
 \*% Retained must be at least 4% for each sieve except max., nom. max., #100 and #200 sieves.  
 \*% Retained must be at least 8% for the 1" sieve when a 2" max. size (nom. Max. 1.5") aggregate is used.

Production Gradation  Batch Plant Gradations  Aggregate Supplier Gradations

**Coarseness Factor: 61**      **Workability Factor: 36**

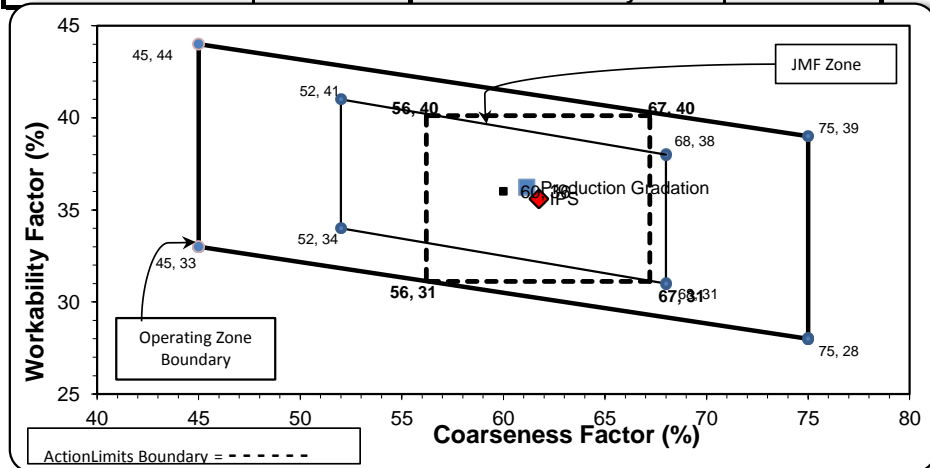

Initial Production Sample (IPS)

Coarseness Factor: 62		Workability Factor: 36	
Sieve	Cumulative % Passing	% Retained	Cumulative % Retained
2"	100.0	0.0	0.0
1.5"	100.0	0.0	0.0
1"	99.2	0.8	0.8
3/4"	91.1	8.1	8.9
1/2"	72.0	19.1	28.0
3/8"	60.3	11.7	39.7
#4	43.4	16.9	56.6
#8	35.6	7.8	64.4
#16	28.4	7.2	71.6
#30	21.8	6.7	78.2
#50	9.1	12.6	90.9
#100	1.7	7.4	98.3
LBW	1.1	0.6	98.9

PREPARED BY:  
 SM, LLC Technical Service

Approved By: